

Job: _____

Item No.: _____

Model No.: **PBPR990**

ALUMINUM ENCLOSED PAN RACK

The ideal cabinet for food delivery and storage in extreme environments. Secure and dependable, these all welded pan racks are also easy to maneuver on heavy-duty PrisonBilt 6" casters with tamper-resistant screws and non-marking wheels.

Features & Benefits:

- Formed door and rear panel create a chimney affect for better top to bottom circulation
- Fully welded and sealed seams create a smooth surface for easier cleaning
- Standard model built just for corrections
- Stainless steel hinges and extra interior bracing
- Padlock holes in door for added security

Optional Upgrades

- Corner Bumpers
- Full perimeter bumpers
- Caster locks
- Open door latch



Warranty:

The PBPR990 carries a one-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins date of purchase and, provided the unit is used in accordance with instructions, is in full effect for one year from that date. Any work performed under this warranty must be performed between the hours of 8:00 a.m. and 5:00 p.m. local time, Monday

through Friday. Prisonbilt will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Prisonbilt shall not be liable for any consequential, compensatory, incidental, or special damages. Contact the Prisonbilt service department for any warranty claims.

PRISONBILT

4900 W. Electric Avenue • West Milwaukee, WI 53219
phone (414) 902-6680 • fax (414) 902-6446
www.prisonbilt.com


Job: _____

Item No.: _____

Model No.: **PBPR990**

Construction Specifications:

- **Construction:** Heavy-duty, high tensile, extruded aluminum. Type 6063-T5 alloy.
- **Upper Frame and Top:** The upper frame is constructed of vertical uprights 1" x 2-1/2" x 1/8" thick extruded aluminum channels with top cross and side bracing of 1-1/4" x 1-1/4" x .070 wall extruded aluminum tubing , all fully welded together. A solid cap of .063 thick aluminum is welded to uprights and cross bracing.
- **Compound Guides:** Interlocking solid wall type, extruded aluminum panels. Each panel has a series of guides spaced 1-1/2" on center, with 1/2" ledges and .090 wall thickness. The guides are welded to the vertical uprights.
- **Rear Panel:** .080 thick aluminum panel with a corrugation on each side for strength and enhanced air circulation. Panel is welded to the top, bottom, and rear vertical uprights.
- **Door:** Consists of 1/8" thick aluminum panel with a corrugation on each side. The door is supported by three stainless steel hinges designed to provide 270° door swing. A positive gravity catch is provided to retain door in a closed position. A universal card holder is bolted to the upper front of the door.
- **Tie Rod:** 3/4" x 1" x .070 wall extruded aluminum tube tie rod is welded to the front vertical uprights for extra rigidity.
- **Bottom Frame:** 1/8" thick aluminum sheet with four sides bent down 1-3/8", all corners welded smoothly. Tubular framework welded inside the 1/8" aluminum sheet for extra rigidity. Caster plates (2-3/4" x 4-3/8" thick pre-tapped) are welded to bottom of frame.
- **Casters:** Four platform type 6" casters , full swivel design with sealed ball bearing axle and non-marking wheels.

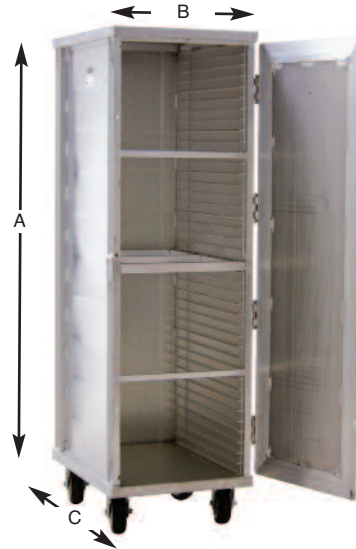

DIMENSIONS:

- A) Height: 68"
- B) Width: 20-7/8"
- C) Depth: 27-5/8"

SHIPPING INFORMATION:

Freight Class:
 Net Weight:
 Shipping Weight:

SHIPPING BOX DIMENSIONS:

Height:
 Width:
 Length:

Item Number	Description	Overall Size			Case Weight Lbs	Case Cube Cu Ft
		W	L	H		
PBPR990	Enclosed Pan Rack	20-1/2"	29-1/2"	70"	132	25.9

PRISONBILT